

Peak Negative-Pulse Grid Voltage .....	250	volts
Peak Cathode Current .....	105	mA
Average Cathode Current .....	30	mA
Plate Dissipation .....	5.5	watts

**MAXIMUM CIRCUIT VALUE**

Grid-Circuit Resistance, for cathode-bias operation .....	2.2	megohms
---	-----	---------


# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

† Under no circumstances should this absolute value be exceeded.

Refer to chart at end of section.	<b>12B8GT</b>
Refer to type 6BA6.	<b>12BA6</b>
Refer to chart at end of section.	<b>12BA7</b>
Refer to chart at end of section.	<b>12BD6</b>
Refer to type 6BE3.	<b>12BE3</b>
Refer to type 6BE6.	<b>12BE6</b>
Refer to chart at end of section.	<b>12BF6</b>
Refer to type 6BF11.	<b>12BF11</b>
Refer to chart at end of section.	<b>12BH7</b>

**MEDIUM-MU TWIN TRIODE**

**12BH7A**



**9A**

Miniature type used as combined vertical-deflection amplifier and vertical oscillator, and as horizontal-deflection oscillator, in television receivers, and in phase-inverter and multivibrator circuits. Outlines section, 6E; requires miniature 9-contact socket. Each triode unit is independent of the other except for the common heater.

Heater Arrangement:	<b>Series</b>	<b>Parallel</b>	
Heater Voltage (ac/dc) .....	12.6	6.3	volts
Heater Current .....	0.3	0.6	ampere
Heater Warm-up Time (Average) .....	—	11	seconds
Heater-Cathode Voltage:			
Peak value .....		±200 max	volts
Average value .....		100 max	volts
Direct Interelectrode Capacitances (Approx.):	<b>Unit No.1</b>	<b>Unit No.2</b>	
Grid to Plate .....	2.6	2.6	pF
Grid to Cathode and Heater .....	3.2	3.2	pF
Plate to Cathode and Heater .....	0.5	0.4	pF
Plate of Unit No.1 to Plate of Unit No.2 .....		0.8	pF

**Class A<sub>1</sub> Amplifier (Each Unit)**

**MAXIMUM RATINGS (Design-Center Values)**

Plate Voltage .....	300	volts
Grid Voltage:		
Negative-bias value .....	50	volts
Positive-bias value .....	0	volts
Cathode Current .....	20	mA
Plate Dissipation:		
Each Plate .....	3.5	watts
Both plates (Both units operating) .....	7	watts

**CHARACTERISTICS**

Plate Voltage .....	250	volts
Grid Voltage .....	—10.5	volts
Amplification Factor .....	16.5	
Plate Resistance (Approx.) .....	5300	ohms
Transconductance .....	3100	μmhos
Plate Current .....	11.5	mA
Plate Current for grid voltage of -14 volts .....	4	mA
Grid Voltage (Approx.) for plate current of 50 μA .....	-23	volts

**MAXIMUM CIRCUIT VALUES**

Grid-Circuit Resistance:

For fixed-bias operation .....	0.25	megohm
For cathode-bias operation .....	1	megohm

**Oscillator (Each Unit)**

For operation in a 525-line, 30-frame system


MAXIMUM RATINGS (Design-Center Values)	Vertical-Deflection Oscillator	Horizontal-Deflection Oscillator	
DC Plate Voltage .....	450	450	volts
Peak Negative-Pulse Grid Voltage .....	400	600	volts
Peak Cathode Current .....	70	300	mA
Average Cathode Current .....	20	20	mA
Plate Dissipation:			
Each Plate .....	3.5	3.5	watts
Both Plates (Both units operating) .....	7	7	watts
<b>MAXIMUM CIRCUIT VALUES</b>			
Grid-Circuit Resistance .....	2.2	2.2	megohms

**Vertical-Deflection Amplifier (Each Unit)**

For operation in a 525-line, 30-frame system

**MAXIMUM RATINGS (Design-Center Values)**

DC Plate Voltage .....	450	volts
Peak Positive-Pulse Plate Voltage# (Absolute maximum) .....	1500*	volts
Peak Negative-Pulse Grid Voltage .....	250	volts
Peak Cathode Current .....	70	mA
Average Cathode Current .....	20	mA
Plate Dissipation:		
Each Plate .....	3.5	watts
Both Plates (Both units operating) .....	7	watts

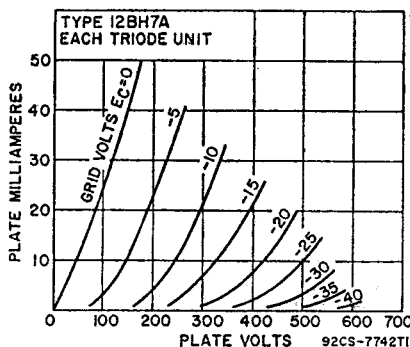**MAXIMUM CIRCUIT VALUE**

Grid-Circuit Resistance for cathode-bias operation .....

2.2 megohms

# Pulse duration must not exceed 15% of a vertical scanning cycle (2.5 milliseconds).

\* Under no circumstances should this absolute value be exceeded.

**12BK5**

Refer to chart at end of section.

**12BL6**

Refer to chart at end of section.

**12BN6**

Refer to chart at end of section.

**12BQ6GTB/12CU6**

Refer to type 6BQ6GTB/6CU6.

**12BR3**

For replacement use type 12AF3/12BR3/12RK19.

**12BR7**

Refer to chart at end of section.

**12BS3**Refer to chart at end of section.  
For replacement use type 12BS3A/12DW4A.